


301120M/TL/SB/24

Domed Lighting Body (Mushroom), Side Lighting & Side Bending

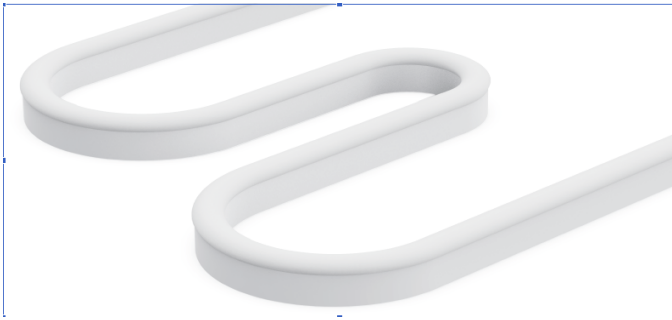

| | | |
|--------------------------------|----|--|
| Output Power/Max Power | W | 12W/Metre, 10 metres per reel |
| Input Rated Voltage | V | 24V |
| Colour Temperature | K | 6500K, 5700K, 4000K, 3000K, 2700K |
| Lumens | lm | 400lm @ 5000K |
| Number of LEDs | | 120 Dot Free |
| LED Type | | Lumileds 2835 |
| Max Ambient Temperature (Ta) | °C | -40°C to +65°C |
| Working Temperature (Tc point) | °C | -40°C to +65°C |
| IP Protection Level | | IP67 & Salt-mist proof |
| Dimensions | mm | W13 x H21.5 |
| Max Length After Feed-in | m | 10 metres Single End, 15 metres Double End |
| Cutting Unit Length | | 100mm |
| Bending Radius | | 60mm |
| Life Time | | >50,000 Hrs |
| Material | | Silicon |
| Detailed Description | | Diffused domed lighting body and White reflector. Dual -colour silicon extrusion. UV & yellowish resistant. Horizontal bend. UL 94 V-0. Easy installation and connection accessories. |
| Applications | | Suitable for building and sign outline lighting, general and cove lighting. Ships, boats & vehicles. Bathroom and Spa lighting. |
| Other Information | | E491839, UR Approved |

ADDITIONAL INFORMATION

Other colours: Red, Green, Blue, Yellow, RGB